WILSON & COUSINS
INTERIOR FIRE PROTECTION

4390 PALETTA COURT, UNIT M, BULINGTON, ONTARIO, CANADA L7L 5R2
1 800 270 6792 | FAX: (905) 637 8655 | info@wilsonandcousins.com

[IE23]

2.5" Standard Angle Hose Valve. 2.5" Female Inlet x 2.5" Male Hose Thread Outlet.



Heavy Duty 2-1/2" (65 mm) angle hose, 300 lb (2070 KPa) pressure tested approved valve. Lightweight cast brass body, Forgeline Bonnett and Seat Assembly. UL/ULC listed and FM Approved. Specify regional hose thread for outlet.


FINISH: Cast Brass

OPTIONS: Polish Brass, Cast Chrome, Polish Chrome

HOSE THREADS AVAILABLE: CSA, BCT, WCT,QST, NSST, NPSH, NST, Louisville, Cleveland, Chicago, Pittsburgh, New Cincinnati, New York Corp., New York Fire Department, Richmond, Raleigh

OTHER HOSE THREADS: PLEASE CONTACT FACTORY

Dimensions:

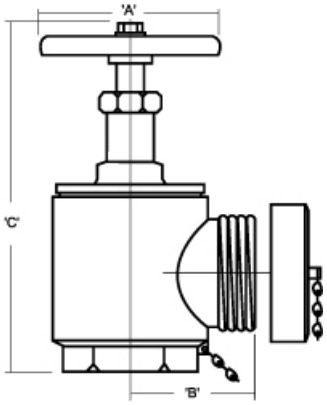

A=5" (125mm)
B=3 3/16" (79mm)
C=11" (OPEN) (275mm)
C=9 1/4" (CLOSED) (231mm)
Weight: 9lbs (4.09 Kg)
Working Pressure: 300lb (2070 Kpa)